

COVERINGSETC

ECO-GRES™

Spec Sheet



Aurora Beige



Babylon Grey



Belmont Black



Bergen Brown



Brewster Brown



Carmel Yellow



Geneva Green**



Monticello Grey



Olean Yellow



Seaford Blue**



Waterloo White



Yonkers Grey


Overview

Encounter the perfect blend of "eco" and "upscale" with Eco-Gres® tiles and mosaics. Eco-Gres® Asia is a Future-Friendly™ material made of through-body, unglazed porcelain. Highly sustainable, easy to install and maintain.

Slip resistant, scratch resistant, stain and fade resistant. No need to seal or wax. Contains pre-consumer recycled content; may help contribute toward LEED credits with USGBC project certification.

Available Sizes

1" x 6" tiles mounted on 12" sheet in grid or brick pattern*
3" x 6" tiles

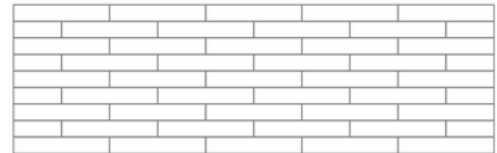

Specifications

Water absorption	ASTM C-373	ISO 10545-3	>0,1%
Breaking Strength		ISO 10545-4	1800 N
Modulus of Rupture	ASTM C-99	ISO 10545-4	50 N/mm ²
Abrasion Resistance	ASTM C-501	ISO 10545-7	128 mm ³
Linear Thermal Expansion	ASTM E-228	ISO 10545-8	6,6 x 10 ⁻⁶ C-1
Thermal Shock Resistance	ASTM C-484	ISO 10545-9	Conforms
Coefficient of Friction	ASTM C-1028		Dry 0.89, Wet 0.75
Stain Resistance		ISO 10545-12	No permanent stains
Chemical Resistance		ISO 10545-13	Conforms